

FIG. 1 is a perspective view of a coin-operated machine 10 with its front door 11 open. The machine has a main body 12 and a top panel 13. A coin slot 14 is located on the front panel. Inside the machine, a coin mechanism 20 is visible, including a coin detector 21, a coin tray 22, and a coin return 23. A control panel 30 is located on the right side of the machine, featuring a display 31 and several buttons 32, 33, 34, 35. A coin tray 36 is also shown. The machine is designed to accept coins and provide a service based on the amount inserted.

FIG. 2

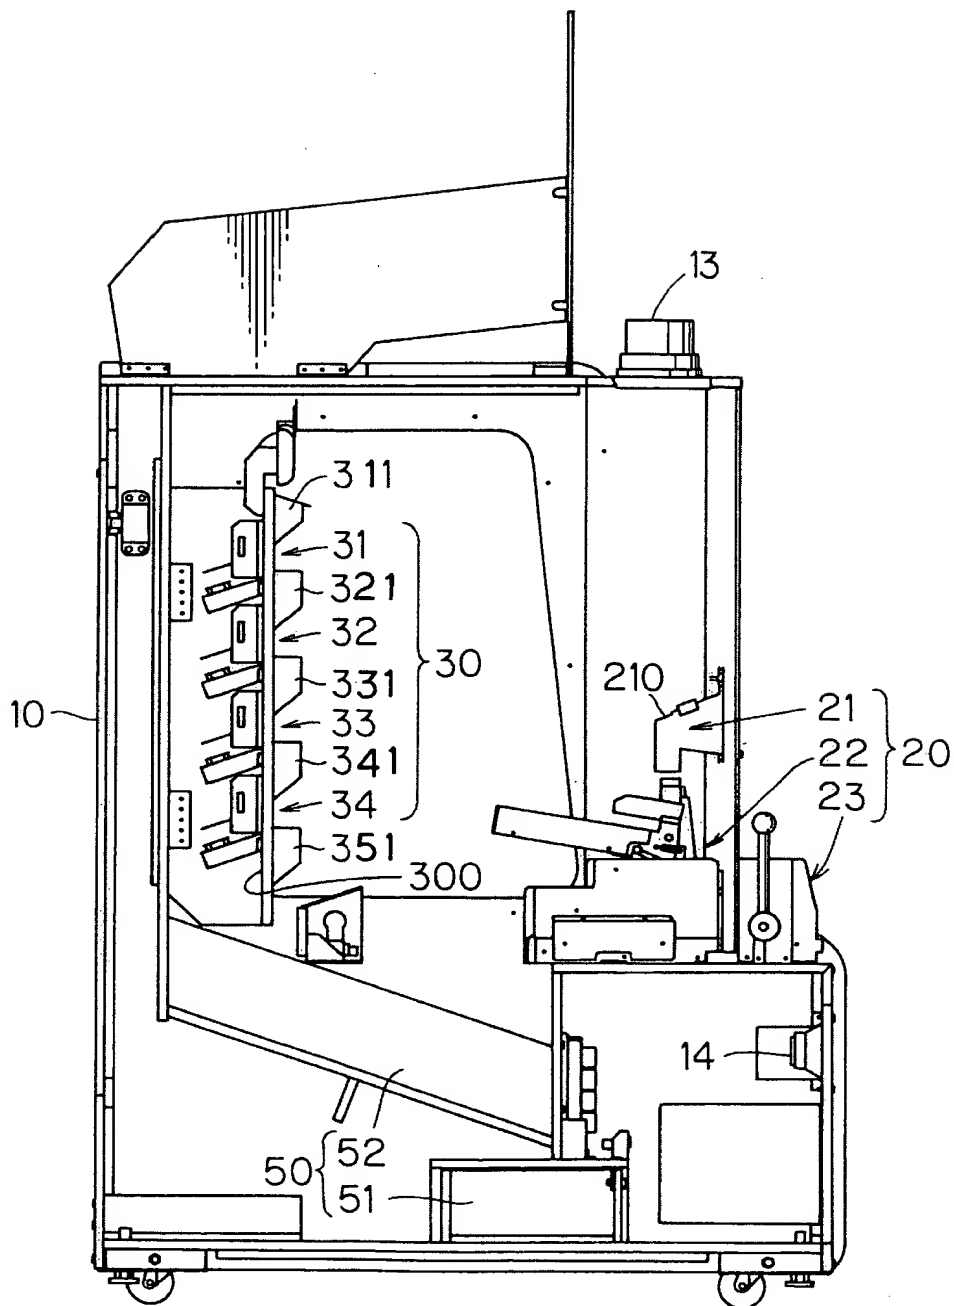


FIG. 2



FIG. 4

FIG. 4

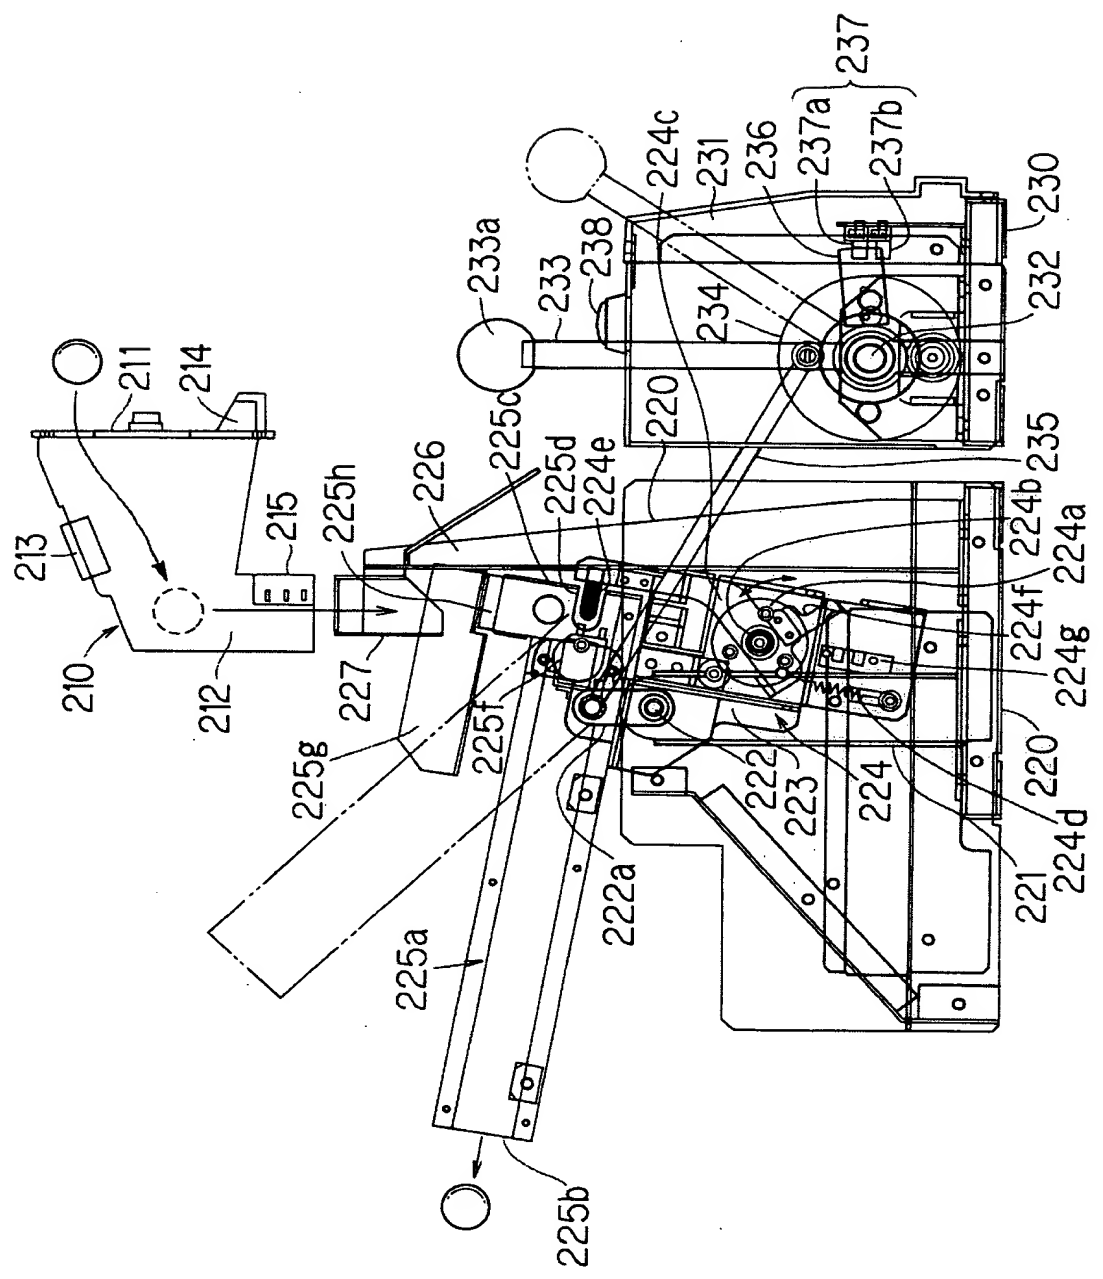


FIG. 5A

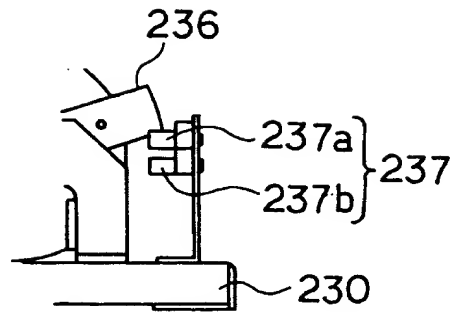


FIG. 5B




FIG. 5C




FIG. 5D





FIG. 5A

FIG. 6

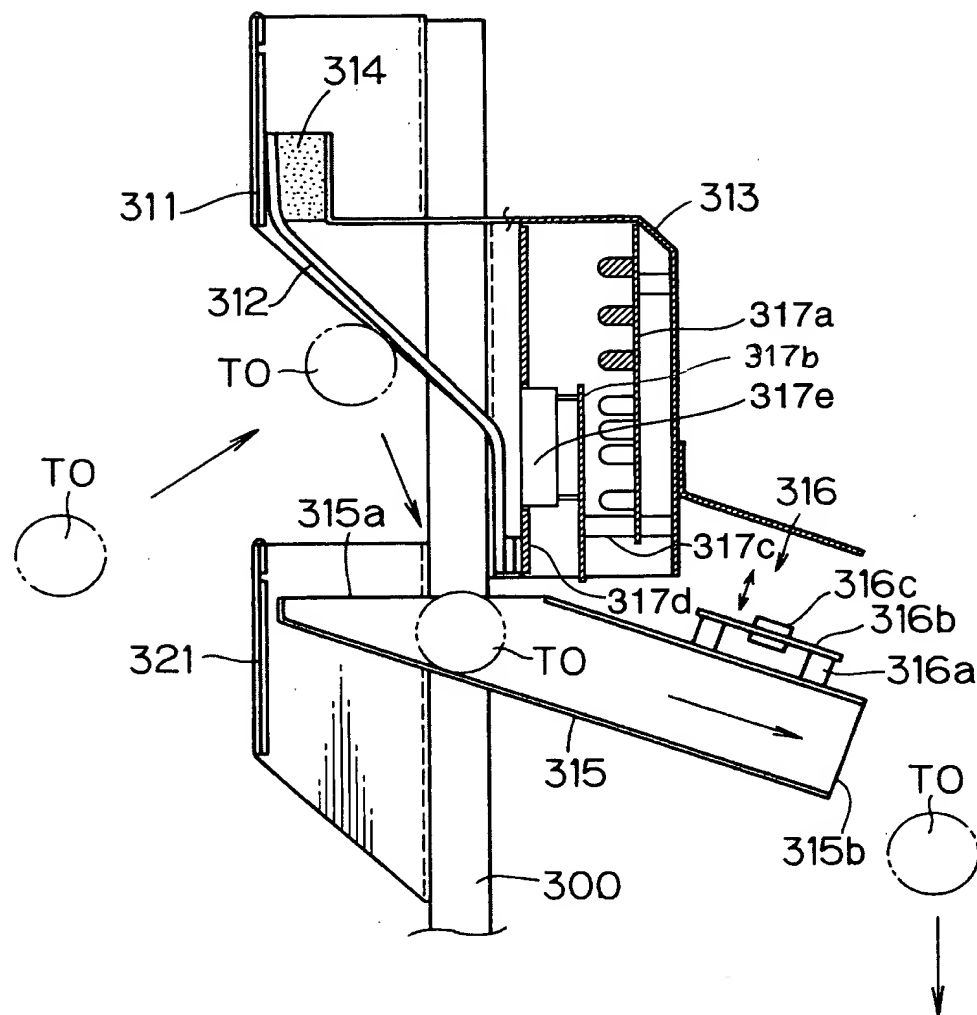

0000007.000000  
T0T260" T2000000

FIG. 7A

FIG. 7A


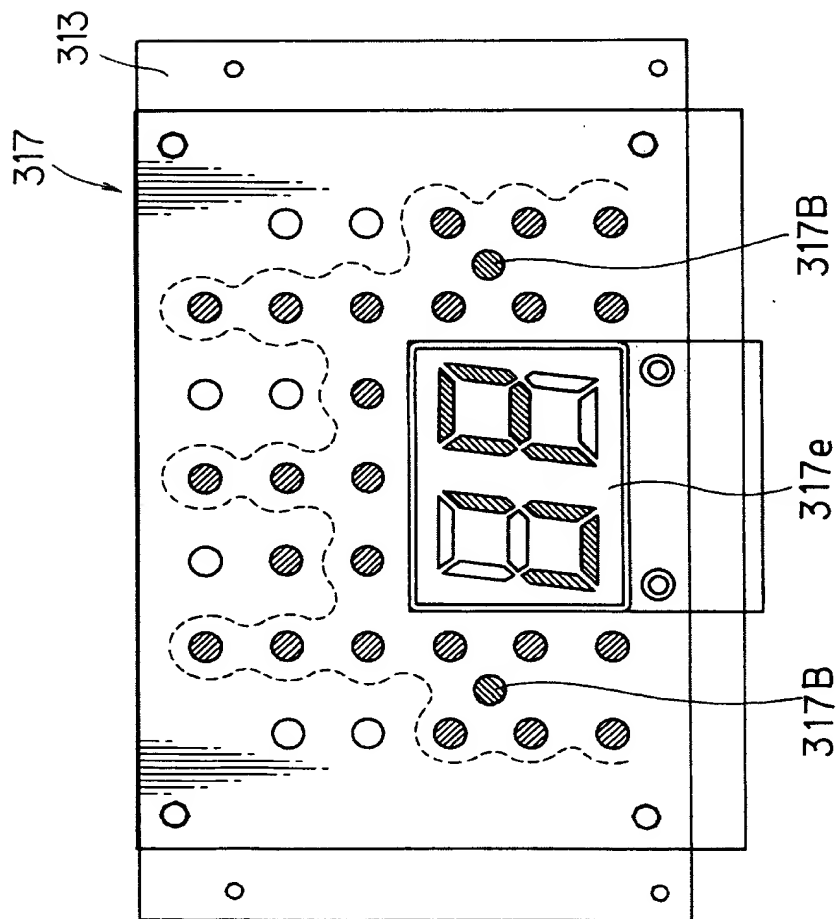


FIG. 7B

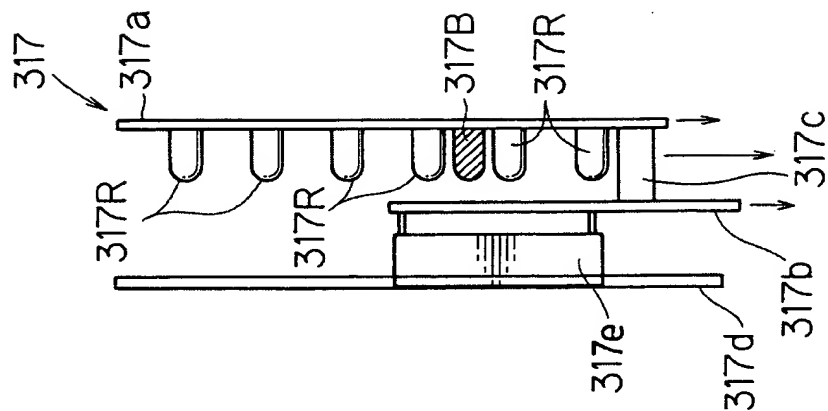

TOP 250" T 2009550

FIG. 7C

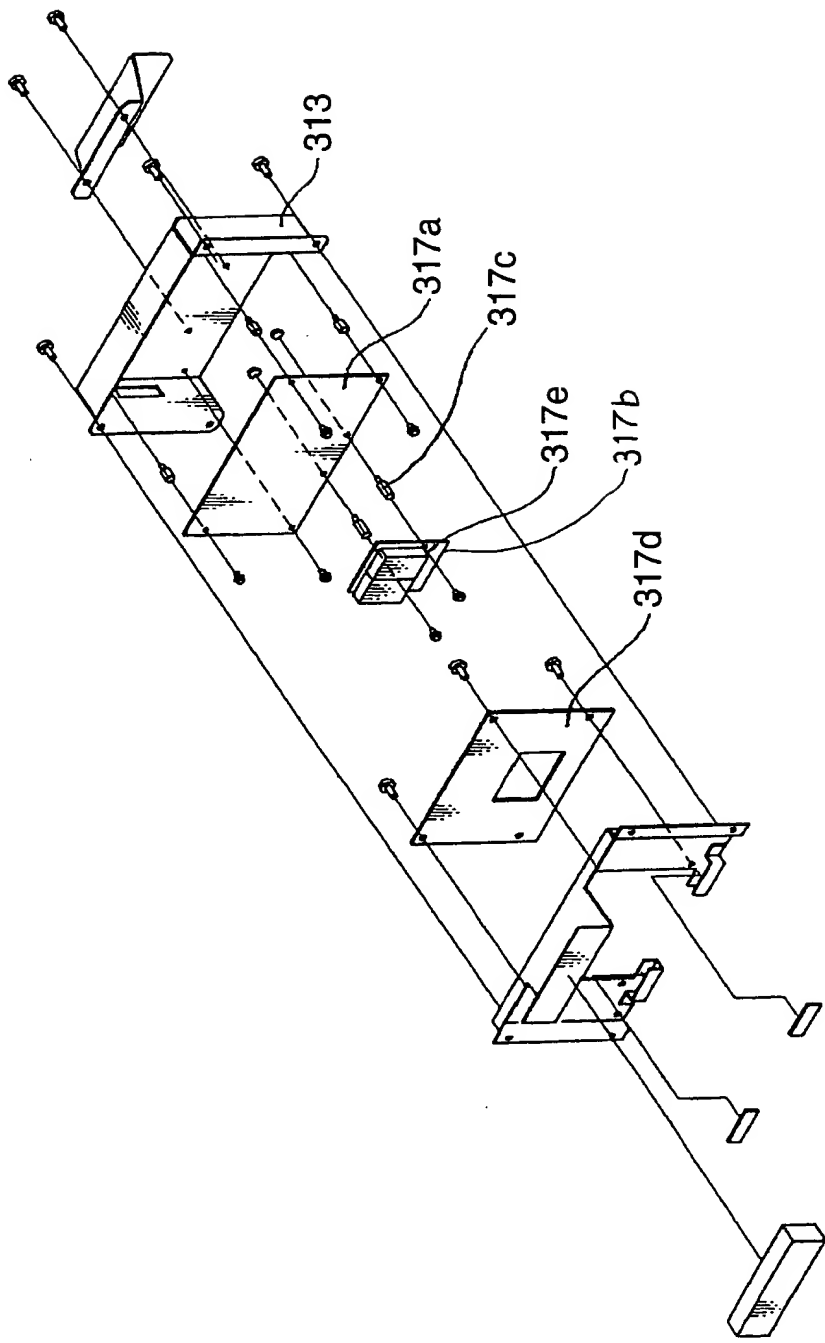


FIG.8

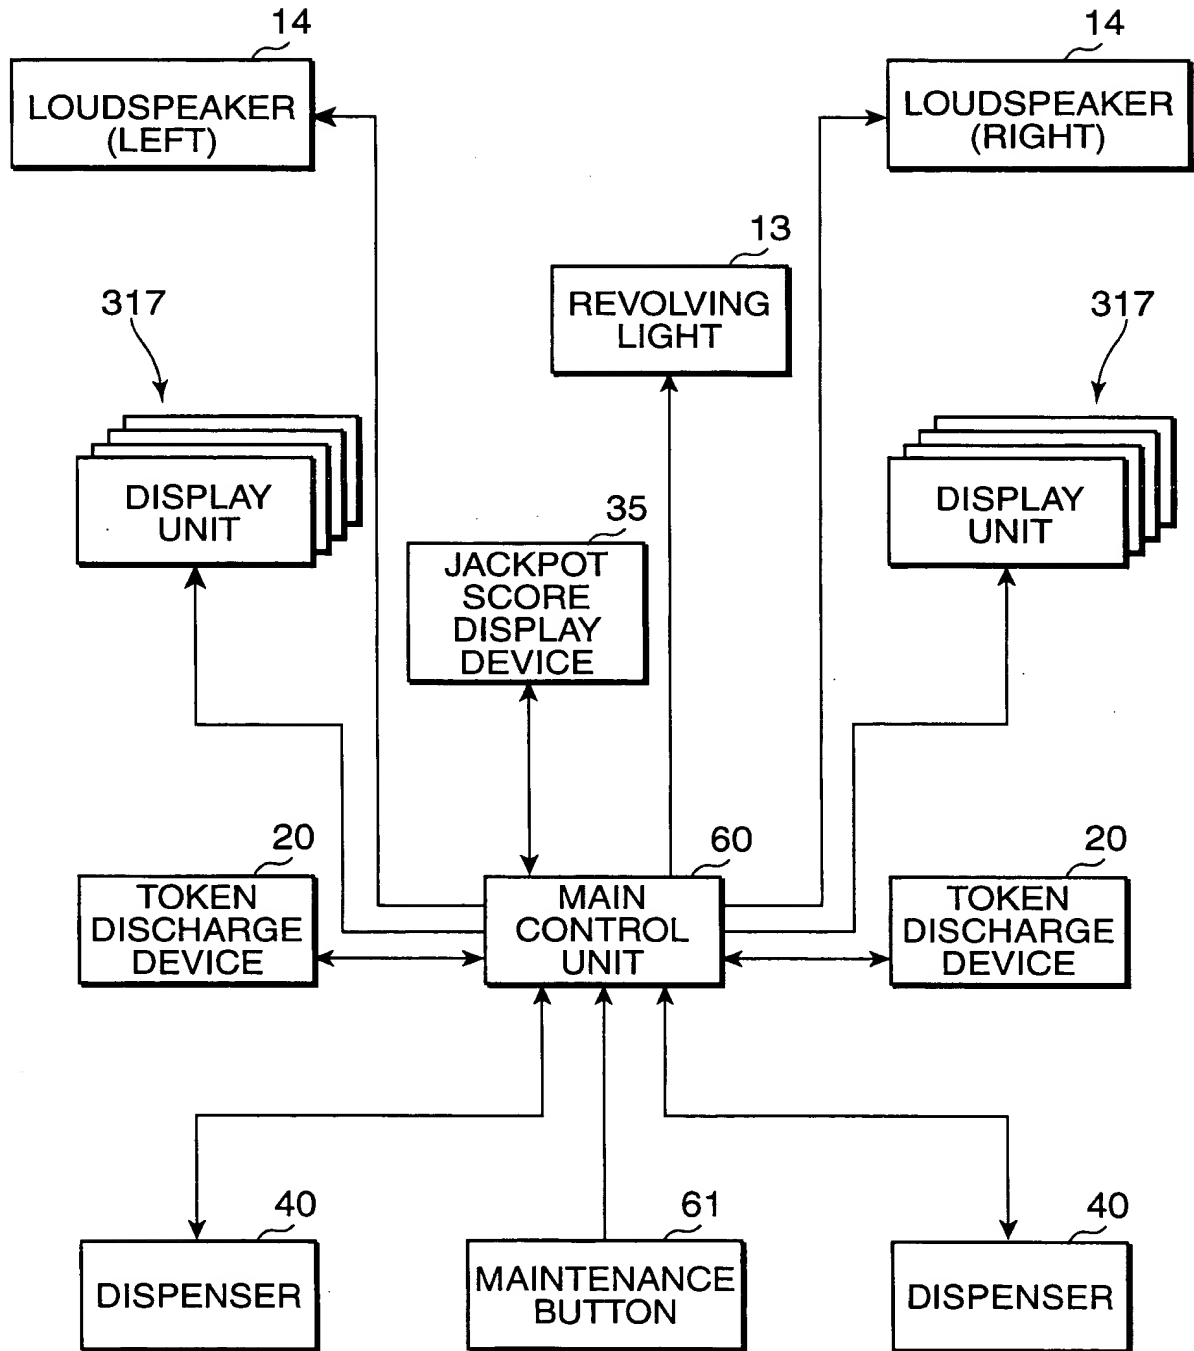


FIG. 8

FIG.9

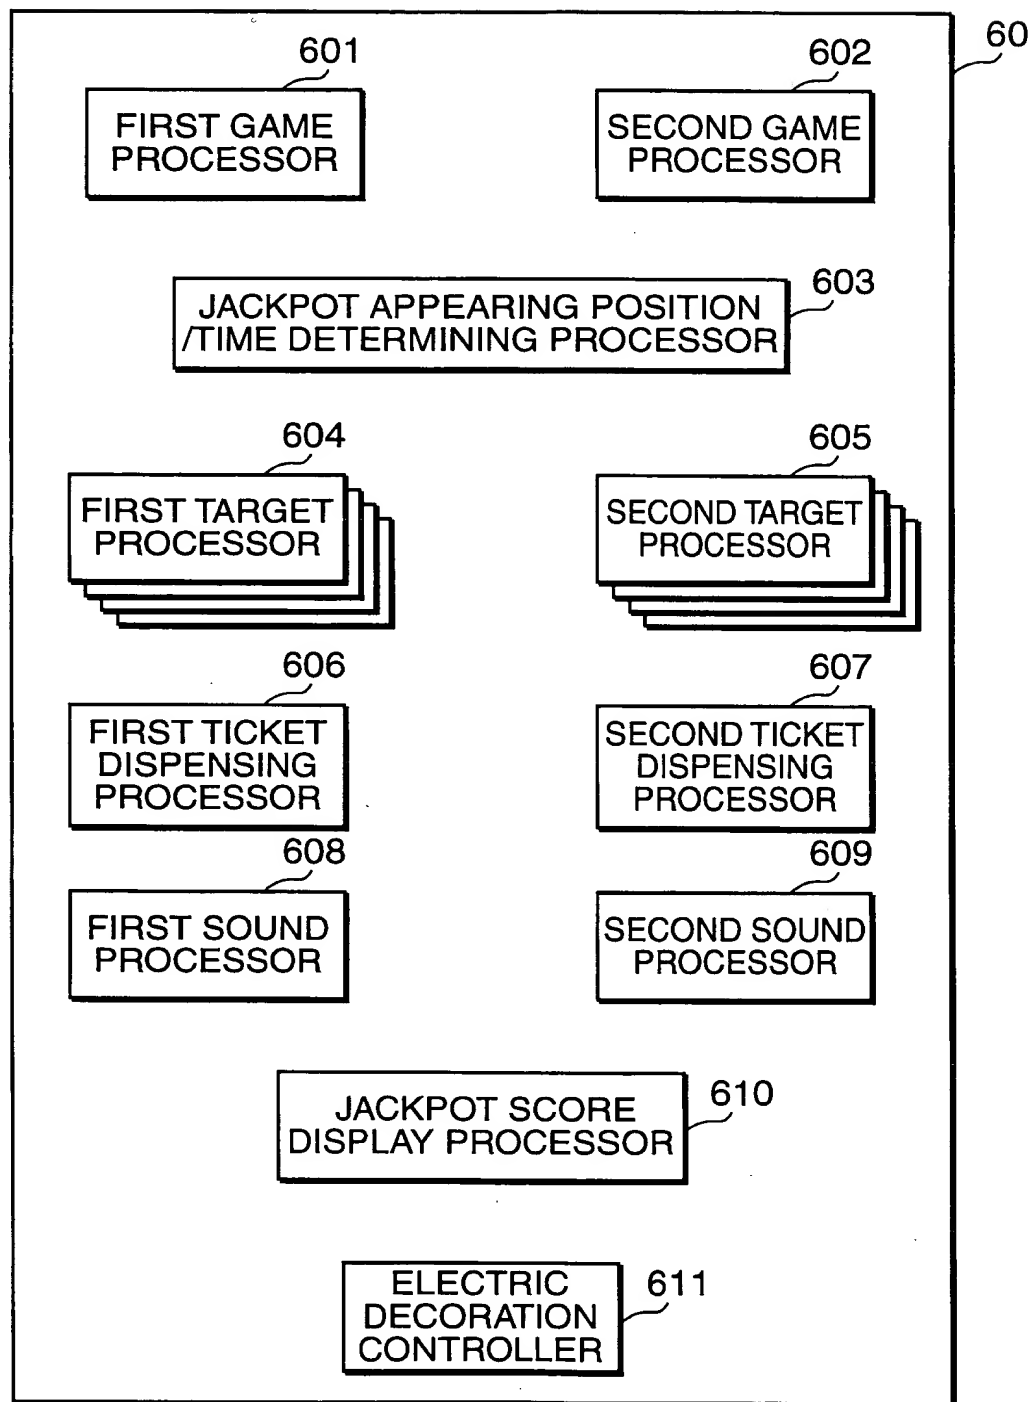


FIG.10

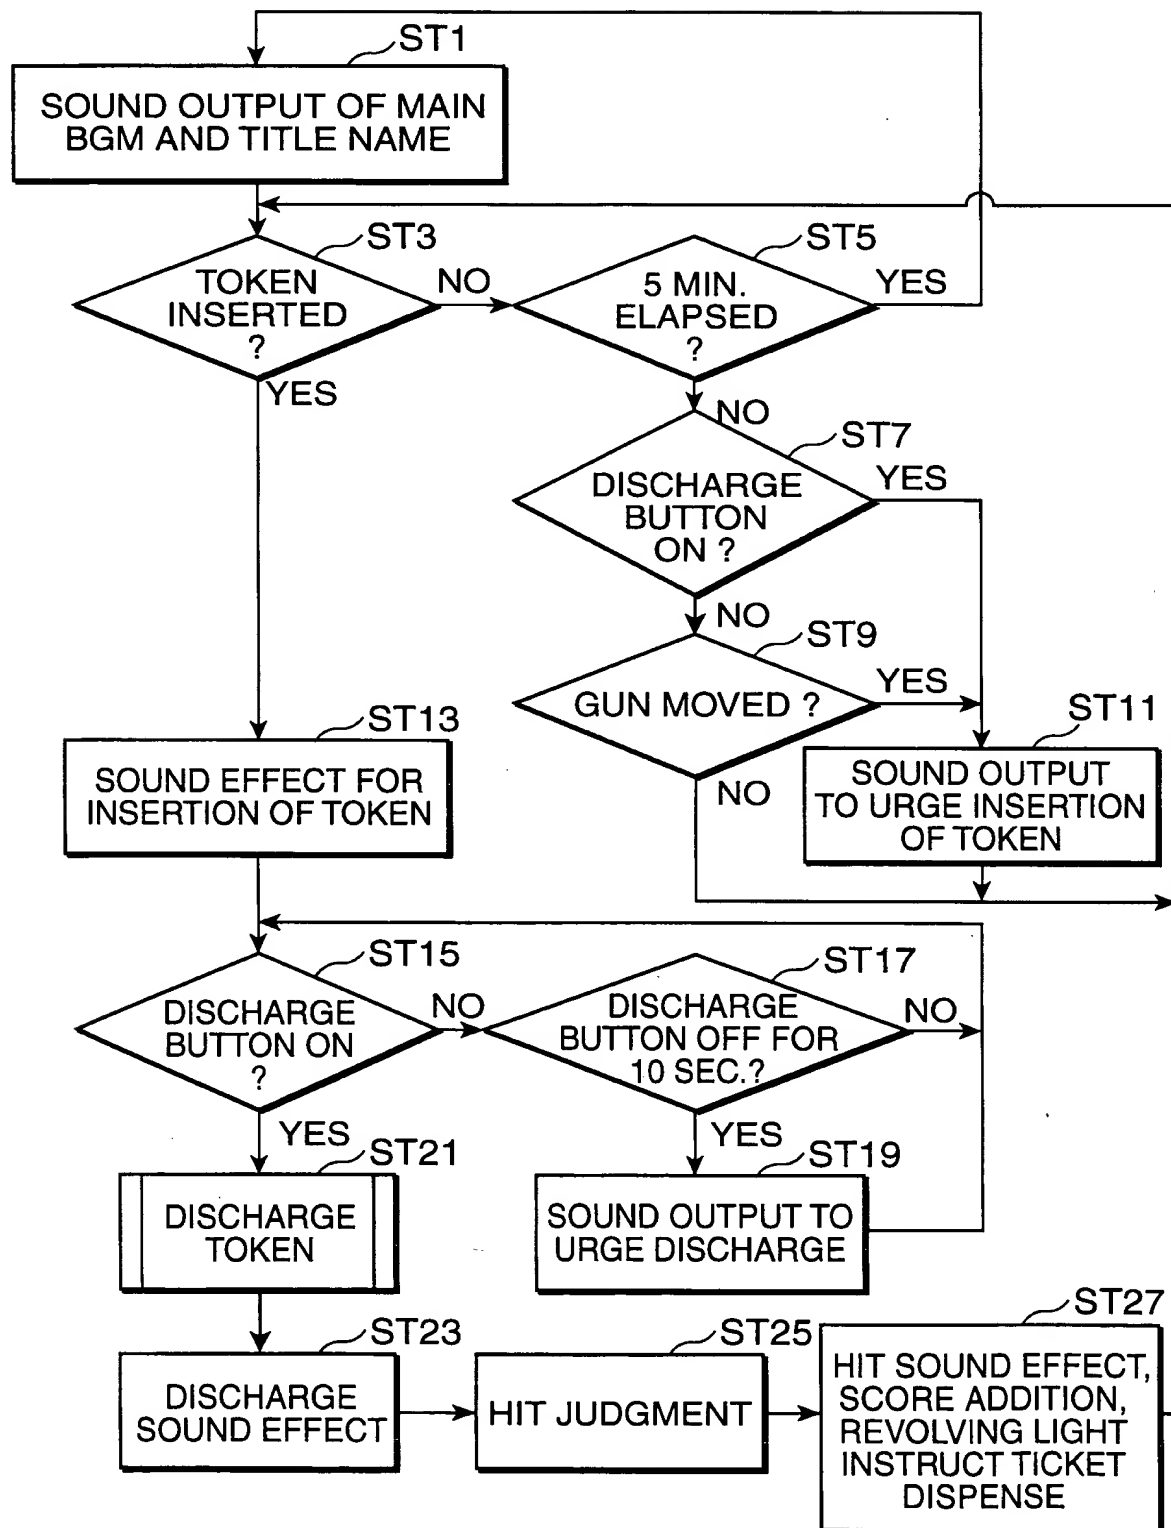


FIG. 10

FIG. 11

FIG.12

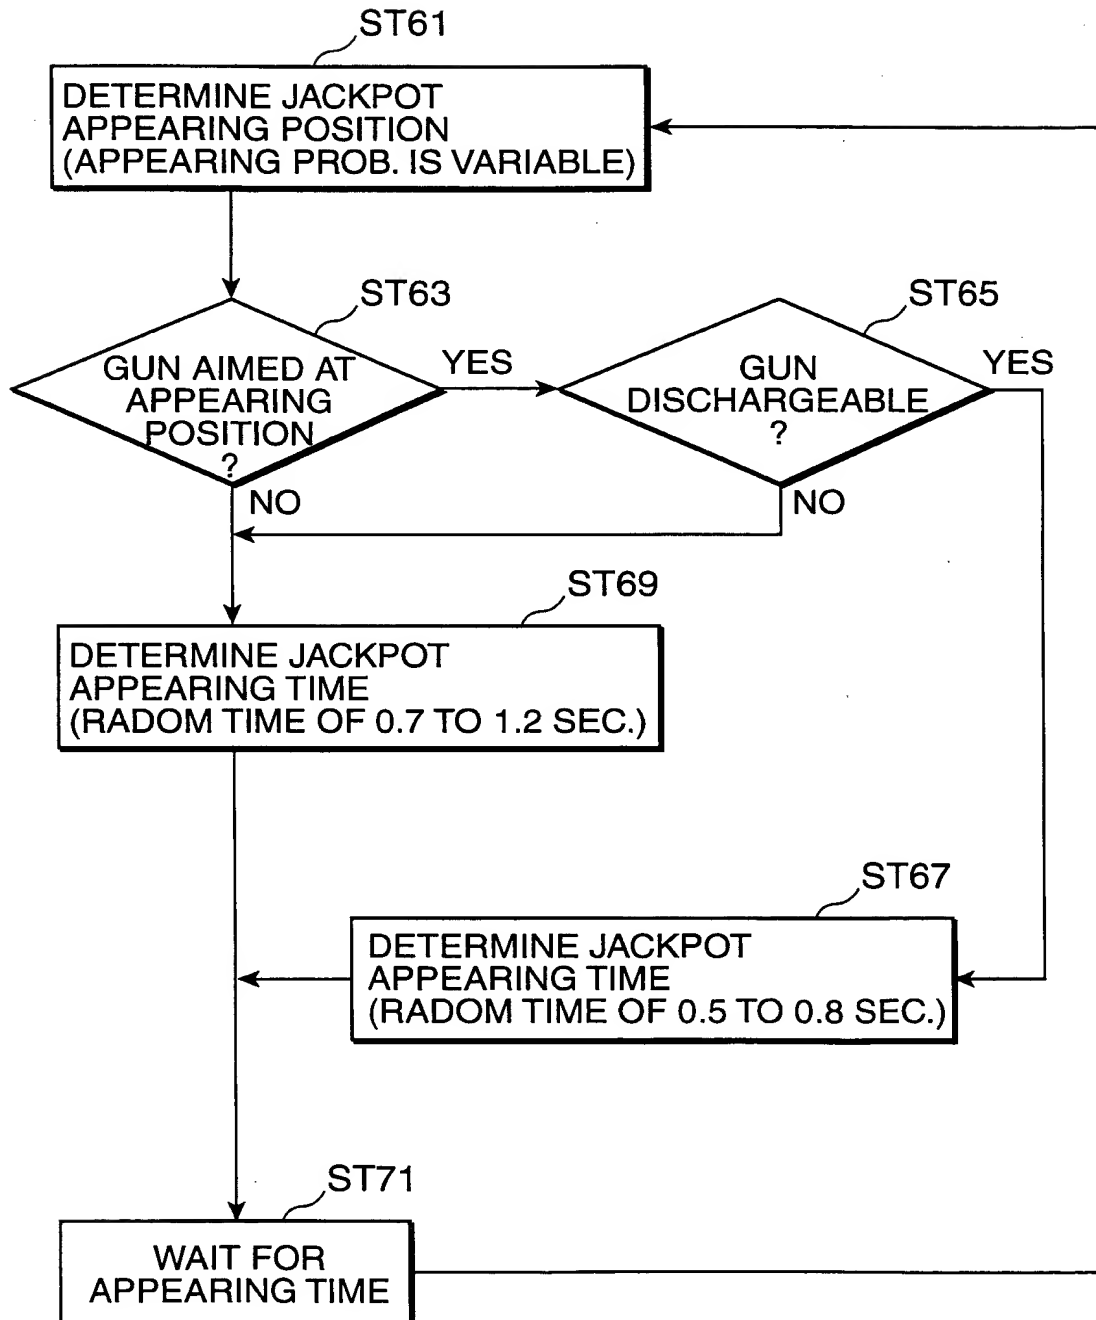


FIG. 12

FIG.13

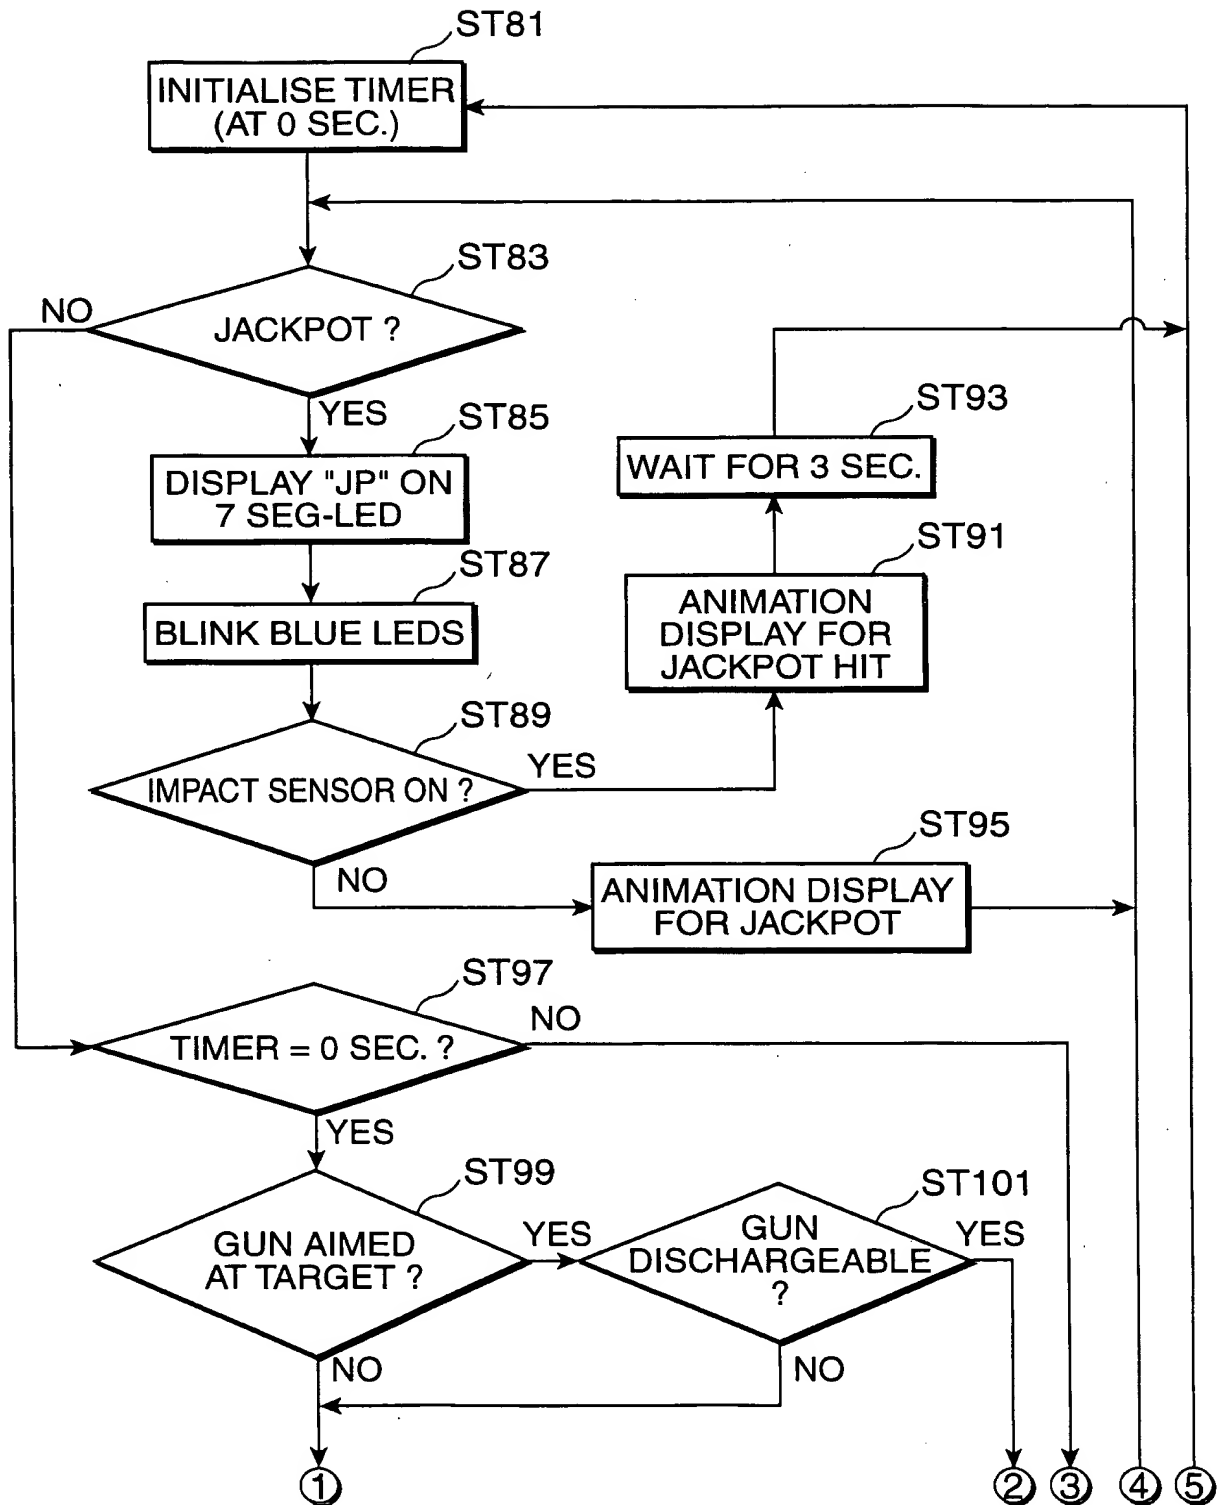


FIG.14

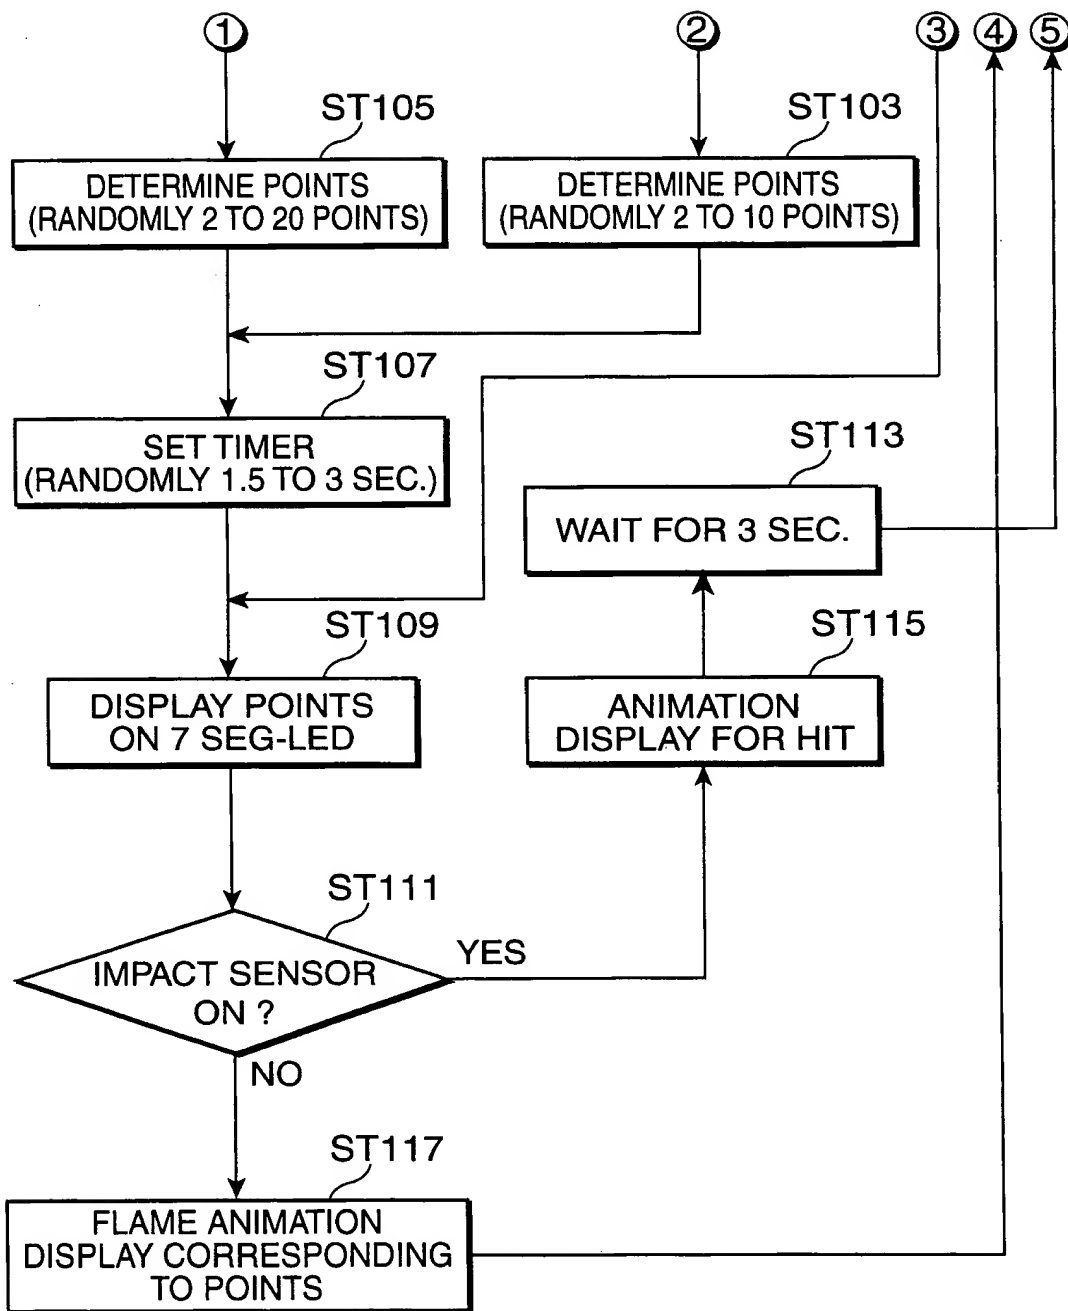


FIG.15

